


Immersion

ARMT-3 Clean Water Applications

- 2-1/2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 - 53 W/in²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt, 1 and 3 Phase
- General Purpose Terminal Enclosure



E1 — Dimensions (Inches)

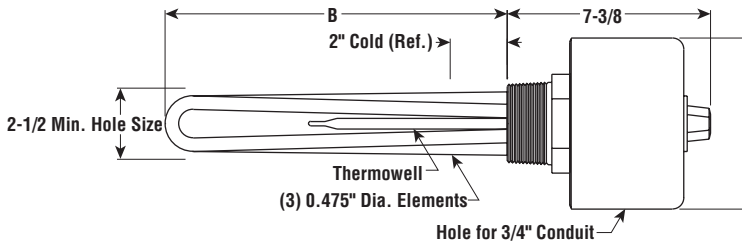

SCREW PLUG



Same-day shipping on stock item orders received before 4 pm CST.
3-day shipping on assembly-stock items.

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/in ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose												
3	120	1	51	3	7-3/8	6	ARMT-3305T2	NS	190852	ARMT-3305T1	NS	310957
3	208	1	51	3	7-3/8	6	ARMT-3305T2	NS	320733	ARMT-3305T1	NS	320741
3	208	3	51	3	7-3/8	6	ARMT-3305T2	NS	320776	ARMT-3305T1	NS	320784
3	240	1	51	3	7-3/8	6	ARMT-3305T2	NS	285819	ARMT-3305T1	NS	285800
3	240	3	51	3	7-3/8	6	ARMT-3305T2	NS	274810	ARMT-3305T1	NS	285843
3	480	1	51	3	7-3/8	6	ARMT-3305T2	NS	270297	ARMT-3305T1	NS	310981
3	480	3	51	3	7-3/8	6	ARMT-3305T2	NS	270300	ARMT-3305T1	NS	310990
3.75	120	1	52	3	8-7/8	6	ARMT-3375T2	NS	190895	ARMT-3375T1	NS	311044
3.75	208	1	52	3	8-7/8	6	ARMT-3375T2	NS	320813	ARMT-3375T1	NS	320821
3.75	208	3	52	3	8-7/8	6	ARMT-3375T2	NS	320856	ARMT-3375T1	NS	320864
3.75	240	1	52	3	8-7/8	6	ARMT-3375T2	NS	285886	ARMT-3375T1	NS	285878
3.75	240	3	52	3	8-7/8	6	ARMT-3375T2	NS	285923	ARMT-3375T1	NS	285915
3.75	480	1	52	3	8-7/8	6	ARMT-3375T2	NS	270350	ARMT-3375T1	NS	311052
3.75	480	3	52	3	8-7/8	6	ARMT-3375T2	NS	274829	ARMT-3375T1	NS	311060
4.5	120	1	48	3	11-3/8	7	ARMT-3455T2	NS	270377	ARMT-3455T1	NS	311132
4.5	208	1	48	3	11-3/8	7	ARMT-3455T2	NS	320899	ARMT-3455T1	NS	320901
4.5	208	3	48	3	11-3/8	7	ARMT-3455T2	NS	320936	ARMT-3455T1	NS	320944
4.5	240	1	48	3	11-3/8	7	ARMT-3455T2	NS	285966	ARMT-3455T1	NS	285958
4.5	240	3	48	3	11-3/8	7	ARMT-3455T2	NS	274837	ARMT-3455T1	NS	285990
4.5	480	1	48	3	11-3/8	7	ARMT-3455T2	NS	286037	ARMT-3455T1	NS	286029
4.5	480	3	48	3	11-3/8	7	ARMT-3455T2	NS	274845	ARMT-3455T1	NS	286061
6	120	1	48	3	17-3/8	8	ARMT-3605T2	NS	270430	ARMT-3605T1	NS	311167
6	208	1	48	3	17-3/8	8	ARMT-3605T2	NS	320979	ARMT-3605T1	NS	320987
6	208	3	48	3	17-3/8	8	ARMT-3605T2	NS	321015	ARMT-3605T1	NS	321023
6	240	1	48	3	17-3/8	8	ARMT-3605T2	NS	286109	ARMT-3605T1	NS	286096
6	240	3	48	3	17-3/8	8	ARMT-3605T2	NS	274853	ARMT-3605T1	NS	286133
6	480	1	48	3	17-3/8	8	ARMT-3605T2	NS	286176	ARMT-3605T1	NS	286168
6	480	3	48	3	17-3/8	8	ARMT-3605T2	S	286213	ARMT-3605T1	NS	286205
7.5	208	1	53	3	19-1/8	8	ARMT-3755T2	NS	321058	ARMT-3755T1	NS	321066
7.5	208	3	53	3	19-1/8	8	ARMT-3755T2	NS	321090	ARMT-3755T1	NS	321103
7.5	240	1	53	3	19-1/8	8	ARMT-3755T2	NS	274861	ARMT-3755T1	NS	286230
7.5	240	3	53	3	19-1/8	8	ARMT-3755T2	NS	286272	ARMT-3755T1	NS	286264
7.5	480	1	53	3	19-1/8	8	ARMT-3755T2	NS	286310	ARMT-3755T1	NS	286301
7.5	480	3	53	3	19-1/8	8	ARMT-3755T2	NS	286352	ARMT-3755T1	NS	286344
9	208	1	47	3	24-1/2	9	ARMT-3905T2	NS	321138	ARMT-3905T1	NS	321146
9	208	3	47	3	24-1/2	9	ARMT-3905T2	NS	321170	ARMT-3905T1	NS	321189
9	240	1	47	3	24-1/2	9	ARMT-3905T2	NS	286395	ARMT-3905T1	NS	286387
9	240	3	47	3	24-1/2	9	ARMT-3905T2	NS	274870	ARMT-3905T1	NS	286424
9	480	1	47	3	24-1/2	9	ARMT-3905T2	NS	286467	ARMT-3905T1	NS	286459
9	480	3	47	3	24-1/2	9	ARMT-3905T2	NS	274888	ARMT-3905T1	NS	285491


"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."

ARMT-3 Clean Water Applications *(cont'd.)*



- 2-1/2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 - 53 W/in²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt,
1 and 3 Phase
- General Purpose Terminal
Enclosure

E1 — Dimensions (Inches)

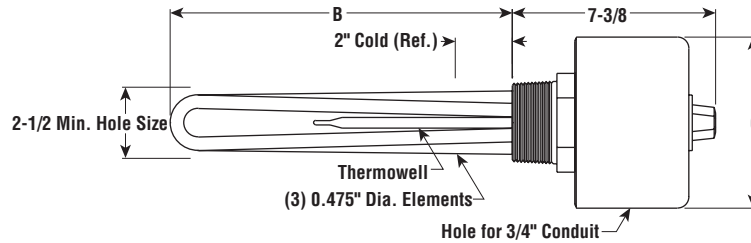

Specifications and Ordering Information

kW	Volts	Phase	W/in ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
							Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose												
12	208	1	46	3	32-5/16	13	ARMT-31205T2 ¹	NS	321218	ARMT-31205T1 ¹	NS	321226
12	208	3	46	3	32-5/16	13	ARMT-31205T2	NS	321250	ARMT-31205T1	NS	321269
12	240	1	46	3	32-5/16	13	ARMT-31205T2 ¹	NS	321293	ARMT-31205T1 ¹	NS	321306
12	240	3	46	3	32-5/16	13	ARMT-31205T2	NS	321330	ARMT-31205T1	NS	321349
12	480	1	46	3	32-5/16	13	ARMT-31205T2	NS	321373	ARMT-31205T1	NS	321381
12	480	3	46	3	32-5/16	13	ARMT-31205T2	NS	321410	ARMT-31205T1	NS	321429
15	208	1	46	3	39-3/4	14	ARMT-31505T2 ¹	NS	321453	ARMT-31505T1 ¹	NS	321461
15	208	3	46	3	39-3/4	14	ARMT-31505T2	NS	321496	ARMT-31505T1	NS	321509
15	240	1	46	3	39-3/4	14	ARMT-31505T2 ¹	NS	321533	ARMT-31505T1 ¹	NS	321541
15	240	3	46	3	39-3/4	14	ARMT-31505T2	NS	321576	ARMT-31505T1	NS	321584
15	480	1	46	3	39-3/4	14	ARMT-31505T2	NS	321613	ARMT-31505T1	NS	321621
15	480	3	46	3	39-3/4	14	ARMT-31505T2	NS	321656	ARMT-31505T1	NS	321664
18	208	3	46	3	47-1/4	15	ARMT-31805T2 ¹	NS	321699	ARMT-31805T1 ¹	NS	321701
18	240	1	46	3	47-1/4	15	ARMT-31805T2 ¹	NS	321736	ARMT-31805T1 ¹	NS	321744
18	240	3	46	3	47-1/4	15	ARMT-31805T2	NS	321779	ARMT-31805T1	NS	321787
18	480	1	46	3	47-1/4	15	ARMT-31805T2	NS	321816	ARMT-31805T1	NS	321824
18	480	3	46	3	47-1/4	15	ARMT-31805T2	NS	321859	ARMT-31805T1	NS	321867

Stock Status: S = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Not UL Listed or CSA Certified (Exceeds 48 Amps).

FASTShipSM

Same-day shipping on stock item orders received before 4 pm CST.
 3-day shipping on assembly-stock items.

"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."


Immersion

ARMT-3 Clean Water Applications (cont'd.)



- 2-1/2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt, 1 and 3 Phase
- Moisture Resistant/Explosion Resistant Terminal Enclosure

E2 — Dimensions (Inches)

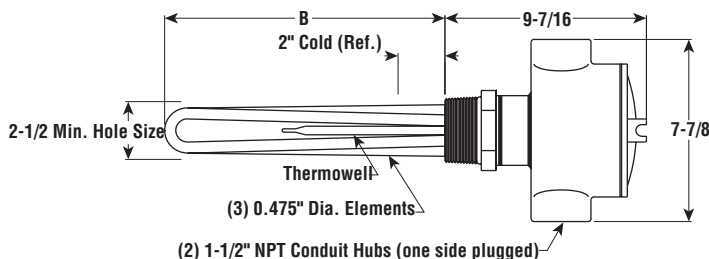

SCREW PLUG



Same-day shipping on stock item orders received before 4 pm CST.
3-day shipping on assembly-stock items.

Specifications and Ordering Information

kW	Volts	Phase	W/In ²	No. Elem.	DIMB (In.)	Wt. (Lbs.)	T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
							Model	Stock	PCN	Model	Stock	PCN
E2 Moisture Resistant/Explosion Resistant												
3	120	1	51	3	7-3/8	11	ARMT-3305E2T2	NS	310965	ARMT-3305E2T1	NS	310973
3	208	1	51	3	7-3/8	11	ARMT-3305E2T2	NS	320750	ARMT-3305E2T1	NS	320768
3	208	3	51	3	7-3/8	11	ARMT-3305E2T2	NS	320792	ARMT-3305E2T1	NS	320805
3	240	1	51	3	7-3/8	11	ARMT-3305E2T2	NS	285835	ARMT-3305E2T1	NS	285827
3	240	3	51	3	7-3/8	11	ARMT-3305E2T2	NS	285860	ARMT-3305E2T1	NS	285851
3	480	1	51	3	7-3/8	11	ARMT-3305E2T2	NS	311001	ARMT-3305E2T1	NS	311028
3	480	3	51	3	7-3/8	11	ARMT-3305E2T2	NS	311010	ARMT-3305E2T1	NS	311036
3.75	120	1	52	3	8-7/8	11	ARMT-3375E2T2	NS	311079	ARMT-3375E2T1	NS	311108
3.75	208	1	52	3	8-7/8	11	ARMT-3375E2T2	NS	320830	ARMT-3375E2T1	NS	320848
3.75	208	3	52	3	8-7/8	11	ARMT-3375E2T2	NS	320872	ARMT-3375E2T1	NS	320880
3.75	240	1	52	3	8-7/8	11	ARMT-3375E2T2	NS	285907	ARMT-3375E2T1	NS	285894
3.75	240	3	52	3	8-7/8	11	ARMT-3375E2T2	NS	285940	ARMT-3375E2T1	NS	285931
3.75	480	1	52	3	8-7/8	11	ARMT-3375E2T2	NS	311087	ARMT-3375E2T1	NS	311116
3.75	480	3	52	3	8-7/8	11	ARMT-3375E2T2	NS	311095	ARMT-3375E2T1	NS	311124
4.5	120	1	48	3	11-3/8	12	ARMT-3455E2T2	NS	311140	ARMT-3455E2T1	NS	311159
4.5	208	1	48	3	11-3/8	12	ARMT-3455E2T2	NS	320910	ARMT-3455E2T1	NS	320928
4.5	208	3	48	3	11-3/8	12	ARMT-3455E2T2	NS	320952	ARMT-3455E2T1	NS	320960
4.5	240	1	48	3	11-3/8	12	ARMT-3455E2T2	NS	285982	ARMT-3455E2T1	NS	285974
4.5	240	3	48	3	11-3/8	12	ARMT-3455E2T2	NS	286010	ARMT-3455E2T1	NS	286002
4.5	480	1	48	3	11-3/8	12	ARMT-3455E2T2	NS	286053	ARMT-3455E2T1	NS	286045
4.5	480	3	48	3	11-3/8	12	ARMT-3455E2T2	NS	286088	ARMT-3455E2T1	NS	286070
6	120	1	48	3	17-3/8	13	ARMT-3605E2T2	NS	311175	ARMT-3605E2T1	NS	311183
6	208	1	48	3	17-3/8	13	ARMT-3605E2T2	NS	320995	ARMT-3605E2T1	NS	321007
6	208	3	48	3	17-3/8	13	ARMT-3605E2T2	NS	321031	ARMT-3605E2T1	NS	321040
6	240	1	48	3	17-3/8	13	ARMT-3605E2T2	NS	286125	ARMT-3605E2T1	NS	286117
6	240	3	48	3	17-3/8	13	ARMT-3605E2T2	NS	286150	ARMT-3605E2T1	NS	286141
6	480	1	48	3	17-3/8	13	ARMT-3605E2T2	NS	286192	ARMT-3605E2T1	NS	286184
6	480	3	48	3	17-3/8	13	ARMT-3605E2T2	NS	286221	ARMT-3605E2T1	NS	274896
7.5	208	1	53	3	19-1/8	13	ARMT-3755E2T2	NS	321074	ARMT-3755E2T1	NS	321082
7.5	208	3	53	3	19-1/8	13	ARMT-3755E2T2	NS	321111	ARMT-3755E2T1	NS	321120
7.5	240	1	53	3	19-1/8	13	ARMT-3755E2T2	NS	286256	ARMT-3755E2T1	NS	286248
7.5	240	3	53	3	19-1/8	13	ARMT-3755E2T2	NS	286299	ARMT-3755E2T1	NS	286280
7.5	480	1	53	3	19-1/8	13	ARMT-3755E2T2	NS	286336	ARMT-3755E2T1	NS	286328
7.5	480	3	53	3	19-1/8	13	ARMT-3755E2T2	NS	286379	ARMT-3755E2T1	NS	286360
9	208	1	47	3	24-1/2	14	ARMT-3905E2T2	NS	321154	ARMT-3905E2T1	NS	321162
9	208	3	47	3	24-1/2	14	ARMT-3905E2T2	NS	321197	ARMT-3905E2T1	NS	321200
9	240	1	47	3	24-1/2	14	ARMT-3905E2T2	NS	286416	ARMT-3905E2T1	NS	286408
9	240	3	47	3	24-1/2	14	ARMT-3905E2T2	NS	286440	ARMT-3905E2T1	NS	286432
9	480	1	47	3	24-1/2	14	ARMT-3905E2T2	NS	286483	ARMT-3905E2T1	NS	286475
9	480	3	47	3	24-1/2	14	ARMT-3905E2T2	NS	286512	ARMT-3905E2T1	NS	286504


"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."

ARMT-3 Clean Water Applications *(cont'd.)*

- 2-1/2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 - 53 W/in²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt,
1 and 3 Phase
- Moisture Resistant/Explosion
Resistant Terminal Enclosure



E2 — Dimensions (Inches)

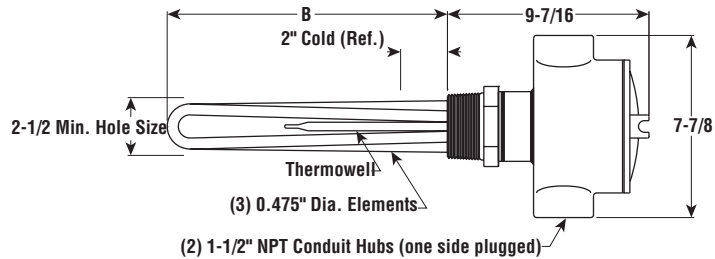

FASTShip

Same-day shipping on stock item
orders received before 4 pm CST.
3-day shipping on assembly-stock items.

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/in ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E2 Moisture Resistant/Explosion Resistant												
12	208	1	46	3	32-5/16	18	ARMT-31205E2T2 ¹	AS	321234	ARMT-31205E2T1 ¹	NS	321242
12	208	3	46	3	32-5/16	18	ARMT-31205E2T2	AS	321277	ARMT-31205E2T1	NS	321285
12	240	1	46	3	32-5/16	18	ARMT-31205E2T2¹	S	321314	ARMT-31205E2T1 ¹	NS	321322
12	240	3	46	3	32-5/16	18	ARMT-31205E2T2	AS	321357	ARMT-31205E2T1	NS	321365
12	480	1	46	3	32-5/16	18	ARMT-31205E2T2	AS	321390	ARMT-31205E2T1	NS	321402
12	480	3	46	3	32-5/16	18	ARMT-31205E2T2	AS	321437	ARMT-31205E2T1	NS	321445
15	208	1	46	3	39-3/4	19	ARMT-31505E2T2 ¹	AS	321470	ARMT-31505E2T1 ¹	NS	321488
15	208	3	46	3	39-3/4	19	ARMT-31505E2T2	AS	321517	ARMT-31505E2T1	NS	321525
15	240	1	46	3	39-3/4	19	ARMT-31505E2T2 ¹	AS	321550	ARMT-31505E2T1 ¹	NS	321568
15	240	3	46	3	39-3/4	19	ARMT-31505E2T2	AS	321592	ARMT-31505E2T1	NS	321605
15	480	1	46	3	39-3/4	19	ARMT-31505E2T2	AS	321630	ARMT-31505E2T1	NS	321648
15	480	3	46	3	39-3/4	19	ARMT-31505E2T2	AS	321672	ARMT-31505E2T1	NS	321680
18	208	1	46	3	47-1/4	20	ARMT-31805E2T2 ¹	AS	311212	ARMT-31805E2T1 ¹	NS	311220
18	208	3	46	3	47-1/4	20	ARMT-31805E2T2 ¹	AS	321710	ARMT-31805E2T1 ¹	NS	321728
18	240	1	46	3	47-1/4	20	ARMT-31805E2T2 ¹	AS	321752	ARMT-31805E2T1 ¹	NS	321760
18	240	3	46	3	47-1/4	20	ARMT-31805E2T2	AS	321795	ARMT-31805E2T1	NS	321808
18	480	1	46	3	47-1/4	20	ARMT-31805E2T2	AS	321832	ARMT-31805E2T1	NS	321840
18	480	3	46	3	47-1/4	20	ARMT-31805E2T2	AS	321875	ARMT-31805E2T1	NS	321883

Stock Status: S = stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Not cCSA_{US}® Certified (Exceeds 48 Amps).

"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."